


Features

- Mainly used as an output signal relay board for CMU (Cell Management Unit)
- CMUR-R includes 3 relays for output signals and CMUR-C includes 4 relays for output signals
- CMUR-R communicates with CMU-4S3A-R and CMU-8S3A-R via RS485 and CMUR-C communicates with CMU-4S3A-C and CMU-8S3A-C via Can 2.0B
- Connectable to CMU and AC Charger for the optimal management of the Li-ion battery charging
- OH, OV, UV Control signals come from CMU of Rich Electric
- Real-time error signal

CMUR-R, RS485 Communication

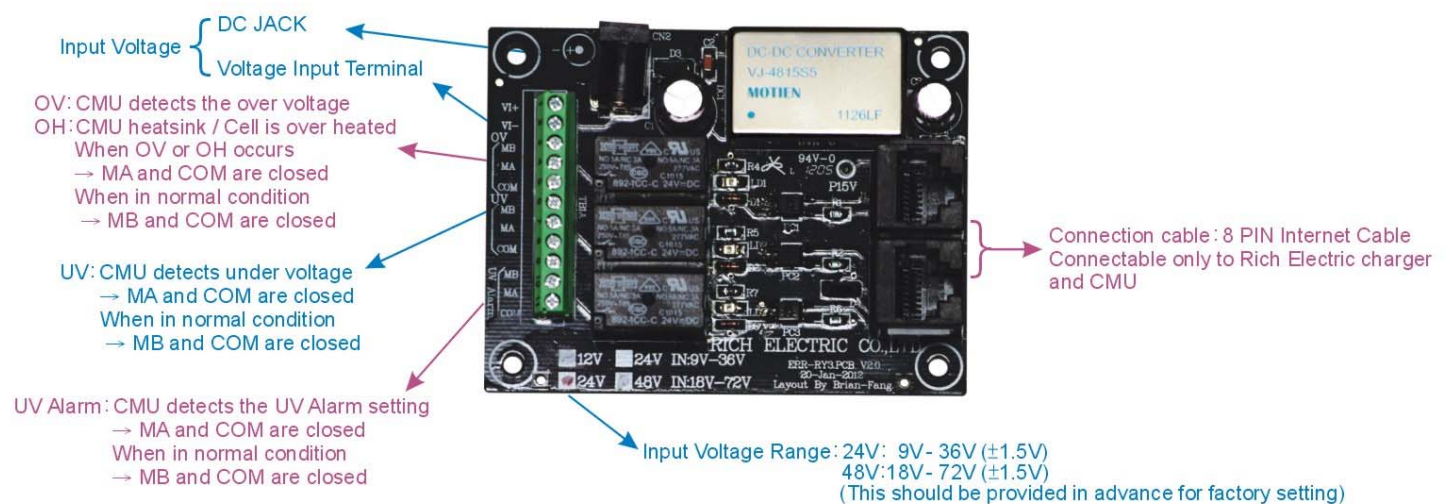

CMUR-C, CAN 2.0B Communication

